



ISO 9001:2008

# Columbus JACK/Regent

*"The Strength of Experience"*

## PRODUCT DATA SHEET

# RHINO AXLE JACK

### Model 9504-55, 95 Ton Capacity

#### Standard Features


- ◆ 95 Ton Capacity
- ◆ Manual Hand Pump
- ◆ Air Powered Pumping Unit
- ◆ Rapid Lifting Arm Extension To Jacking Point with No Load
- ◆ Mechanical Jack Frame Lowering Devices on both Trailing Casters
- ◆ Single External Relief Valve
- ◆ Tow Bar Assembly - Maximum Towing Speed 3 MPH
- ◆ 8" Diameter Casters with Poly Tread
- ◆ Skydrol Resistant Yellow Paint

#### Documentation

- ◆ Operation & Maintenance Manual
- ◆ Certificate of Conformance
- ◆ Load Test Report
- ◆ Factory New - 12 Month Written Warranty

#### Available Optional Equipment

- ◆ 5923-D Wheel/Brake Sling Assembly
- ◆ 5923-E Wheel/Brake Crane Assembly

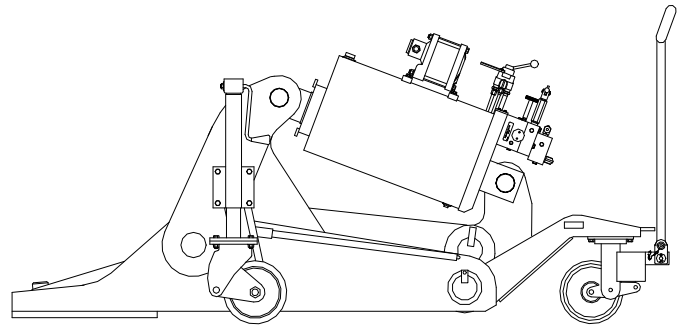

The Rhino Jack is designed for use with multiple flat tires where minimum clearance is available. With excellent mobility characteristics it is easily positioned under the aircraft. Mechanical safety lock nuts permit two or more wheels to be removed simultaneously. It is available with optional sling and crane assembly to remove wheels and brakes from axle.

### RHINO AXLE JACK SPECIFICATIONS

VERTICAL CAPACITY (Tons/m tonnes)	MINIMUM HEIGHT (Inches/mm)	HYDRAULIC LIFT (Inches/mm)	MAXIMUM EXTENDED HEIGHT (Inches/mm)	NET WEIGHT ( Est. ) (Lbs/kg)	CRATED WEIGHT ( Est. ) (Lbs/kg)	CRATE DIMENSIONS (Est. - L x W x H) (Inches/mm)	CU FT CRATED ( Est. ) (Cu ft/cu m)
<b>95.0</b>	<b>4.5</b>	<b>19.5</b>	<b>24.0</b>	<b>5,000</b>	<b>5,500</b>	<b>106 x 40 x 55</b>	<b>135</b>
86.2	114	495	610	2,268	2,495	2,692 x 1,016 x 1,397	3.8




# Columbus JACK/Regent

*"The Strength of Experience"*

ISO 9001:2008

## RHINO AXLE JACK

*Model 9504-55, 95 Ton Capacity*

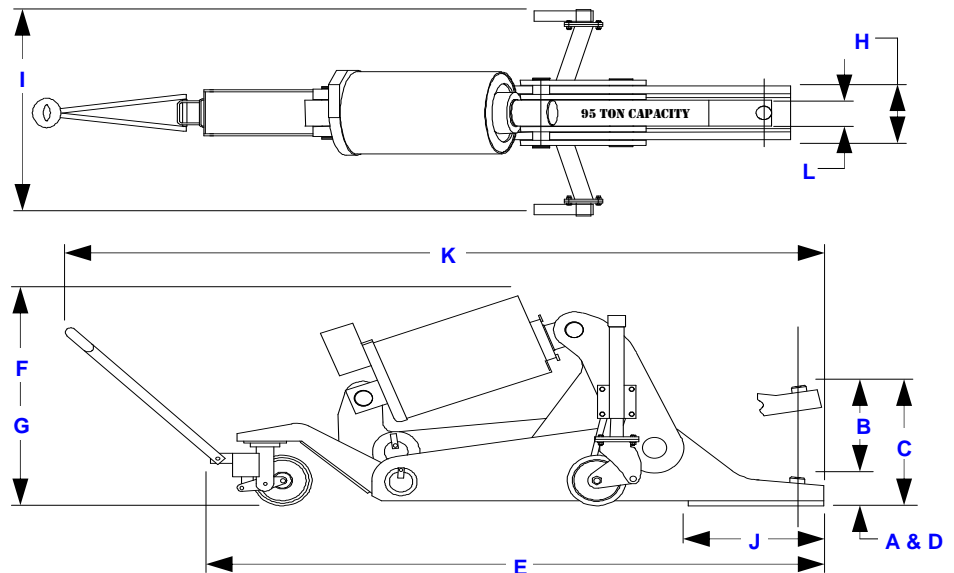

RHINO AXLE JACK SPECIFICATIONS					
	A	B	C	D	E
VERTICAL CAPACITY (Tons/m tonnes)	MINIMUM CLOSED HEIGHT (Inches/mm)	HYD. LIFT (Inches/mm)	MAXIMUM EXTENDED HEIGHT (Inches/mm)	ROLL UNDER HEIGHT (Inches/mm)	LENGTH OF JACK (Inches/mm)
95.0	4.5	19.5	24.0	4.5	103.5
86.2	114	495	610	114	2,629

F	G	H	I	J	K	L
HEIGHT OF JACK UP (Inches/mm)	HEIGHT OF JACK DOWN (Inches/mm)	WIDTH OF JACK BASE (Inches/mm)	WIDTH OF JACK (Inches/mm)	REACH DEPTH BASE (Inches/mm)	OVER ALL LENGTH (Inches/mm)	WIDTH OF ARM (Inches/mm)
41.5	46.5	10.0	38.0	24.0	149.0	5.0
1,054	1,181	254	965	762	3,785	127